

VPR 4x10

Vapor Phase Reactivated Carbon

Description

VPR 4x10 is designed for the removal of organic contaminants from industrial and remediation air stream applications. The carbon is manufactured by the reactivation of previously used carbons to produce a high-density, high surface area, durable reactivated product. VPR 4x10 is effective in a wide range of vapor applications, providing reliable removal of volatile organic and odorous compounds.

Features

- Selected sources of used granular activated carbon
- Reactivated product
- Recyclable product
- High surface area/pore structure

Benefits

- Produces a strongly adsorbing pore structure for a broad range of contaminants and concentrations in vapor phase applications
- Economical alternative to virgin carbon in odor control
- Provides ultimate disposal of pollutants
- Eliminates landfill costs and concerns
- Propagates the cycle of responsible resource utilization
- Efficient in removing a wide range of volatile organic compounds

Applications

- Removal of organic contaminants from industrial and remediation air streams
- Treatment of emissions during startup, shutdown, and maintenance activities
- Point source treatment to remove volatile chemicals
- Treatment of emissions from remediation processes

Packaging

Please contact CalgonCarbon for options and availability.

Specifications

	VPR 4x10
Butane Activity	21.4 (min)
Moisture (As Packaged), wt%	2 (max)
< 10 US Mesh [2.00 mm] (PAN), wt%	5 (max)


Design Considerations

The design of an activated carbon adsorption system is dependent on the adsorbate type, influent concentration, temperature, flow rate, performance objective, and other factors. Calgon Carbon can help evaluate the suitability of VPR 4x10 to satisfy your specific needs and assist in the design of an adsorption system.

In addition to the supply of activated carbon, Calgon Carbon offers a complete line of standardized, pre-engineered adsorption systems for both temporary and permanent applications.

For additional information, please contact Calgon Carbon Corporation by calling 1-800-4-CARBON.

Typical Pressure Drop Curve VPR 4x10

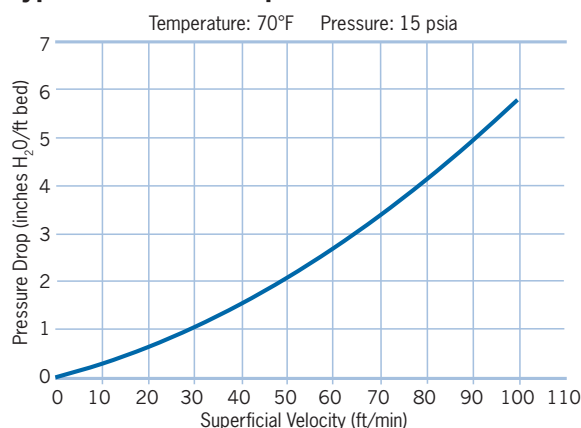

Safety Message

Wet activated carbon preferentially removes oxygen from air. In closed or partially closed containers and vessels, oxygen depletion may reach hazardous levels. If workers are to enter a vessel containing carbon, appropriate sampling and work procedures for potentially low oxygen spaces should be followed, including all applicable federal and state requirements. Please refer to the MSDS for all up to date product safety information.

www.calgoncarbon.com



Corporate Headquarters
 Calgon Carbon Corporation
 500 Calgon Carbon Drive
 Pittsburgh, PA USA 15205
 800.422.7266
 412.787.6700
 412.787.6713 Fax
www.calgoncarbon.com

European Operations
 Chemviron Carbon Corporation
 Zoning Industriel C de Feluy
 B-7181 Feluy, Belgium
 + 32 (0) 64 51 18 11
 + 32 (0) 64 54 15 91 Fax

Asia Operations
 Calgon Carbon Asia Pte Ltd.
 9 Temasek Boulevard
 #26-02 Suntec Tower Two
 Singapore 038989
 +65 6221 3500
 +65 6221 3554 Fax

Your local representative